



Android APK user guide

1, Plugin camera and cable, camera test itself 60s.

2,App Installation


(Notes : Ensure phone's network connection is success when using the app)

1),Download path

Method 1:Find the disk which comes with product, visit the link on the disk.

Method 2: Search "YIPC" on Google Play ,find the app and install.

2), Enable App

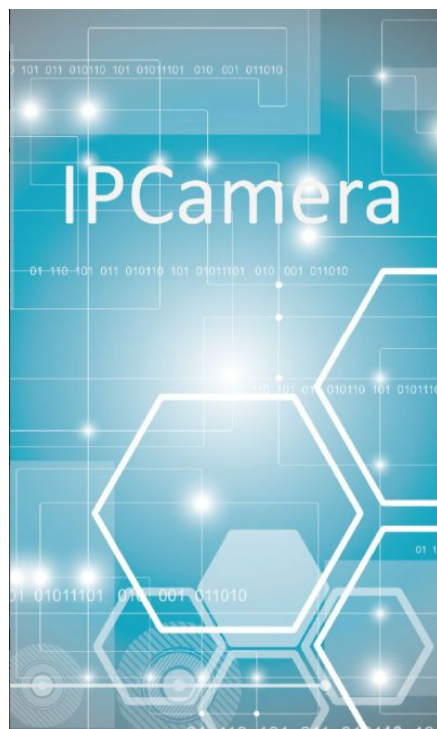


3.Add camera:

Method1: “Click “Add New Camera ” on App main interface to access “Add Camera”interface.Click “Search”, App will find the online cameras which in same LAN with the phone.Select the camera ,input password and click “Done” to finish.


Method 2: Click the “Scan QR Code” on “Add Camera” interface to scan the QR code which on the UID lable,input password and click “Done” to Finish.

Method 3:Input the UID on “Cam ID” text box and default password directly,click “Done” to finish..

Note: The default password of camera’s user name is 12345

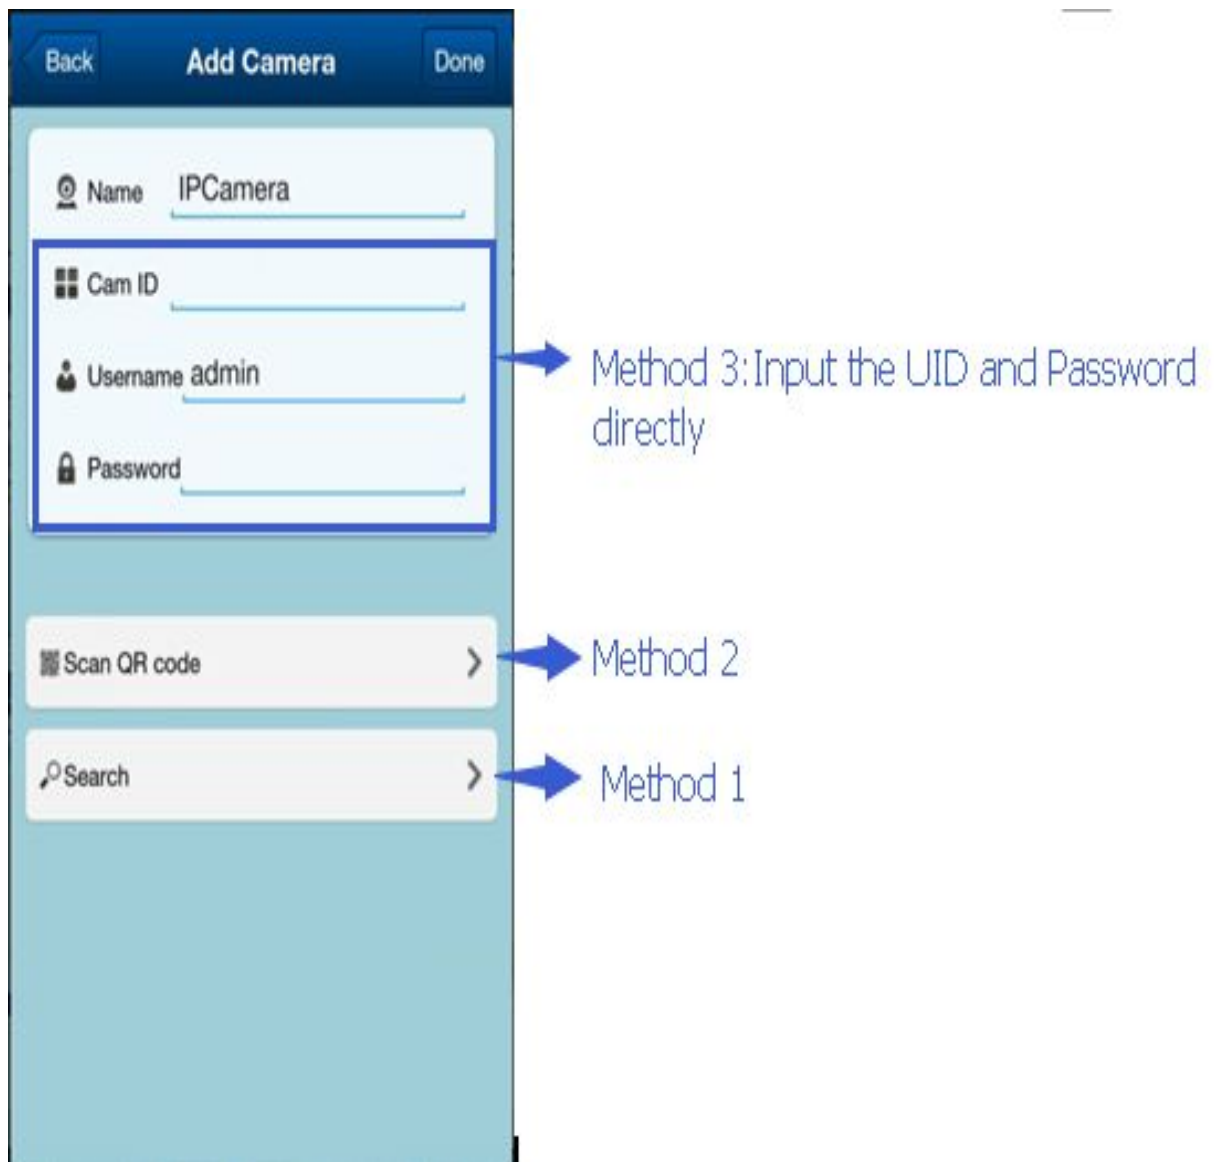



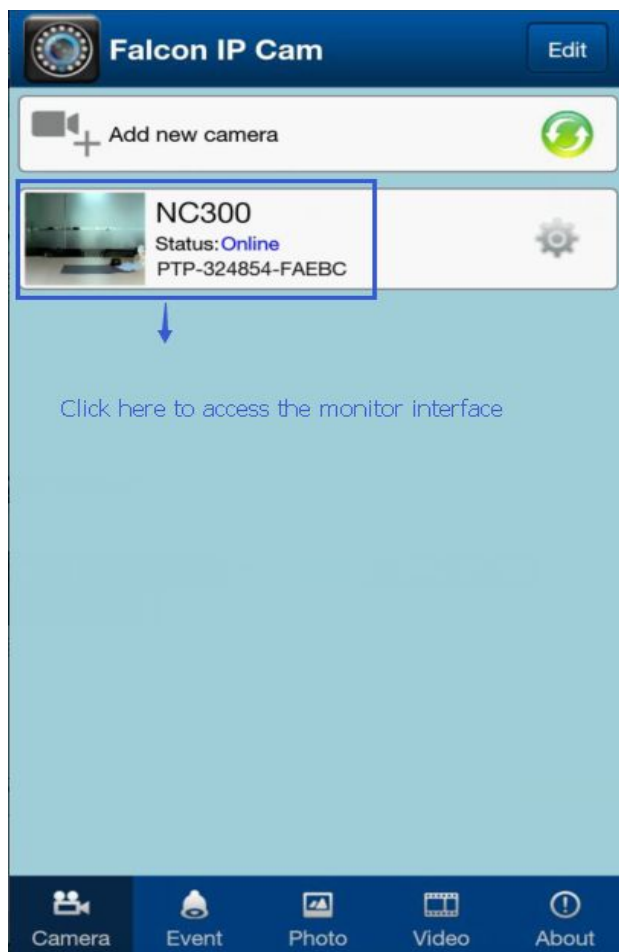



4. Monitoring Interface.





1, This button includes 6 icon buttons

- 1) Horizontally 
- 2) Vertically 
- 3) Color Saturation 
- 4) Enable input alarm 
- 5) Contrast 
- 6) Disable input alarm 

2. Cruising Horizontally

3. Cruising Vertically

4. Preset positions setting

5. Enable/Disable full screen display

6. Close monitoring interface

7, Arrows: Click : Camera view moves as same as the arrows direction

8. Enable/Disable Audio

9. Photo


10. Recording

11. Video quality/resolution setting

12. Reset video settings to factory default

Tips: Turn down the resolution of video to make the video streaming smoothly in bad network condition.

5. Four-cameras viewing mode

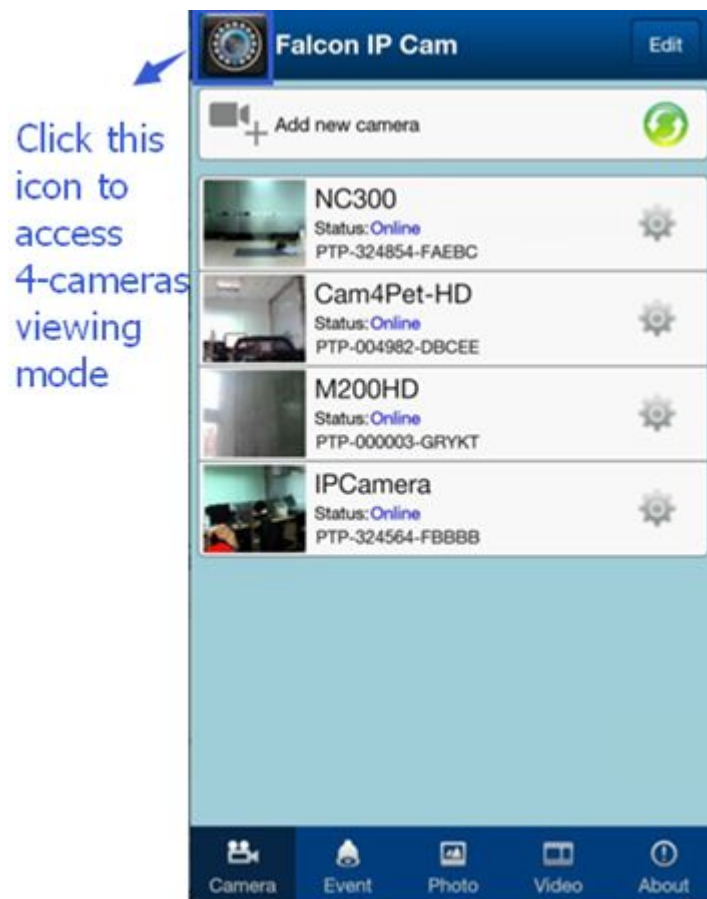



6 ,Main interface functional settings



1, Edit the camera which on camera list, you can delete the camera from camera list or retry the password or user name when it says "wrong"

2, Camera: When you in other page, click this to back to the main interface with camera list.

3, Event: Display the alarm logs

4, Photo: check the recorded photos

5, Video: Check the record videos

6 About: information about this application.


7, Click to access camera setting interface.

7, Remote videos watch




In "Videos" Interface, you can choose "Remote" to check the videos which recorded on the camera's SD Card.


The video's format is avi, you have to use the video player which support avi.

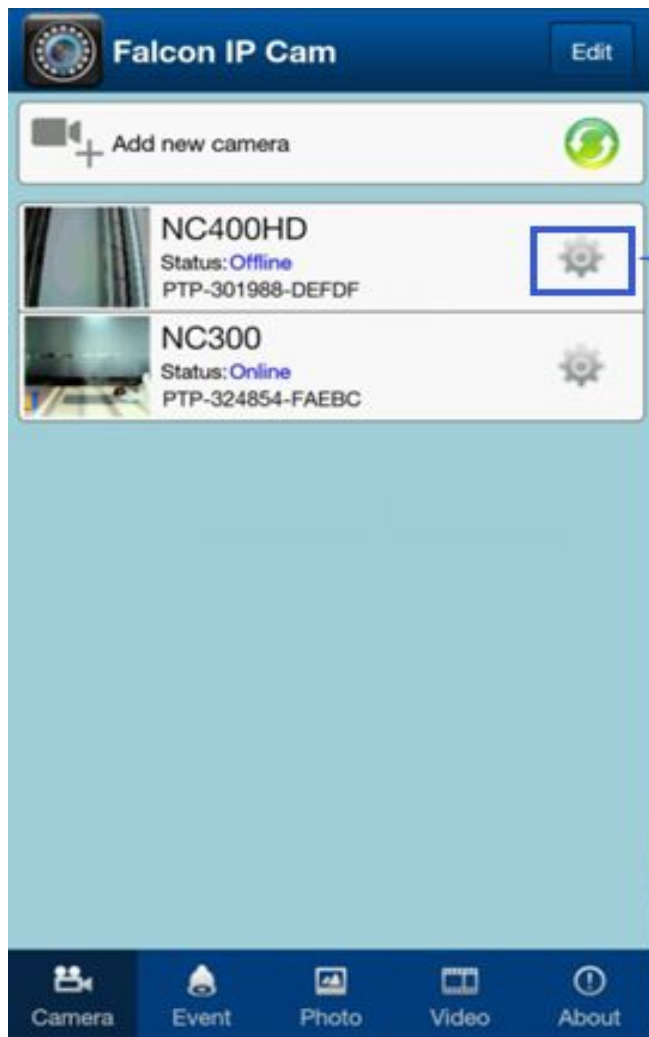


Click this icon to access camera setting interface.

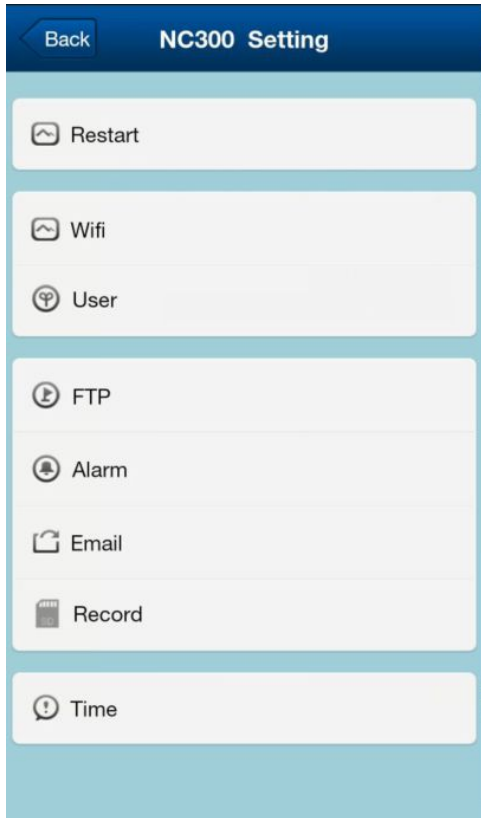

8.1 Restart

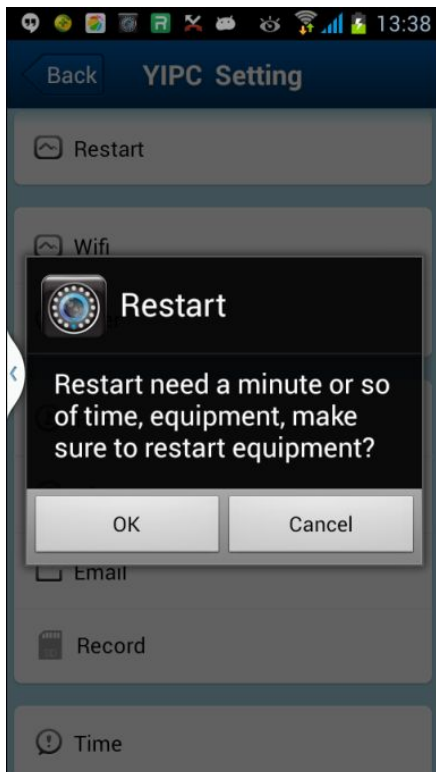

8.2 WIFI setting

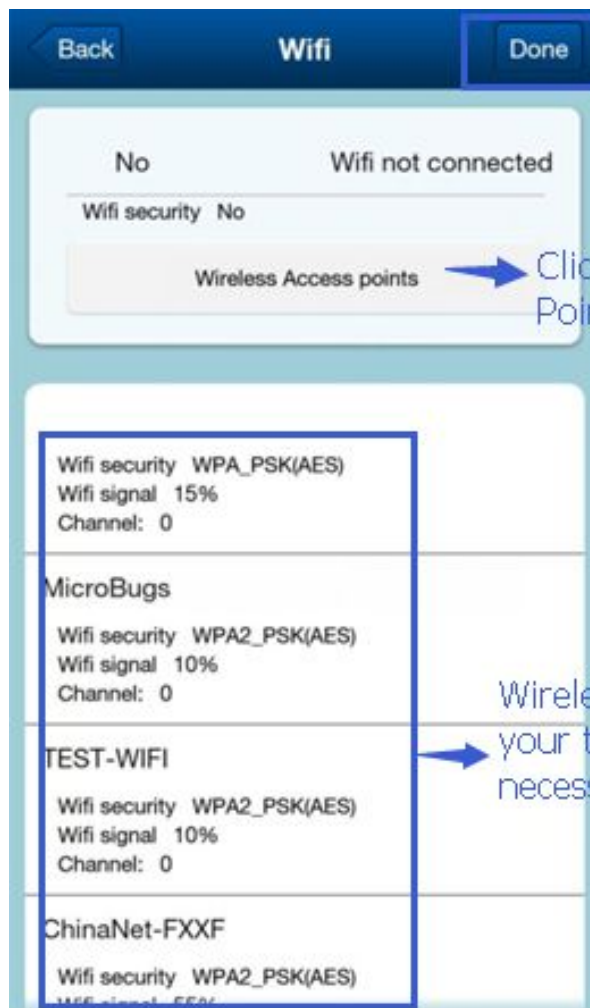

Click "Done" to store and enable WIFI settings, camera will restart automatically, you can unplug the LAN cable to enjoy the WIFI.

Click here to scan the "Wireless Access Points" around you

Wireless Access Ponits displayed, select your target network, input its password(if necessary.)

8.3 User setting

Back User Done

Administrator
User: admin
Password: ●●●●●
 Show password

Operator
User: _____
Password: _____
 Show password

Visitor
User: _____
Password: _____

Click "Done" to store and enable all settings.

Input the user name and password that you need among three types of account.

8.4 Alarm Setting



Sensibility set, the smaller number, the higher sensibility.


Set the preset location alarm, support 16 preset in total.

Enable: Camera will send email notification when alarm (Email setting beforehand is necessary)

Enable: Camera will start to record automatically.

Enable/Disable alarm sound.


8.5 Email Setting



The screenshot shows an Android 'Email' settings screen with the following fields and annotations:

- Done**: A red circle highlights the 'Done' button in the top right corner. A red arrow points to it with the text: "Click 'Done' to store and enable all settings at the end .".
- Sender**: The field contains 'yelow905@gmail.com'. A blue arrow points to it with the text: "Input the email that you want to use for send alarm notification."
- SMTP server**: The field contains 'smtp.gmail.com'. A blue arrow points to it with the text: "Input the SMTP server of your send email ,or you can click the icon to choose.".
- SMTP port**: The field contains '465'. A blue arrow points to it with the text: "Input the SMTP port of your sender email".
- Verify**: A checkbox is checked with a green checkmark. A blue arrow points to it with the text: "Enable".
- SSL**: The dropdown menu is set to 'NONE'. A blue arrow points to it with the text: "Choose it decide by your sender email."
- SMTP user**: The field contains 'yelow905@gmail.com'. A blue arrow points to it with the text: "Input the sender email again".
- SMTP password**: The field contains seven black dots. A blue arrow points to it with the text: "Input the password of your sender email."
- Receiver email address 1-4**: A blue box highlights the four receiver email address fields. A blue arrow points to the box with the text: "Set the receiver email address, you can set 4 in total".

8.6, Record Setting

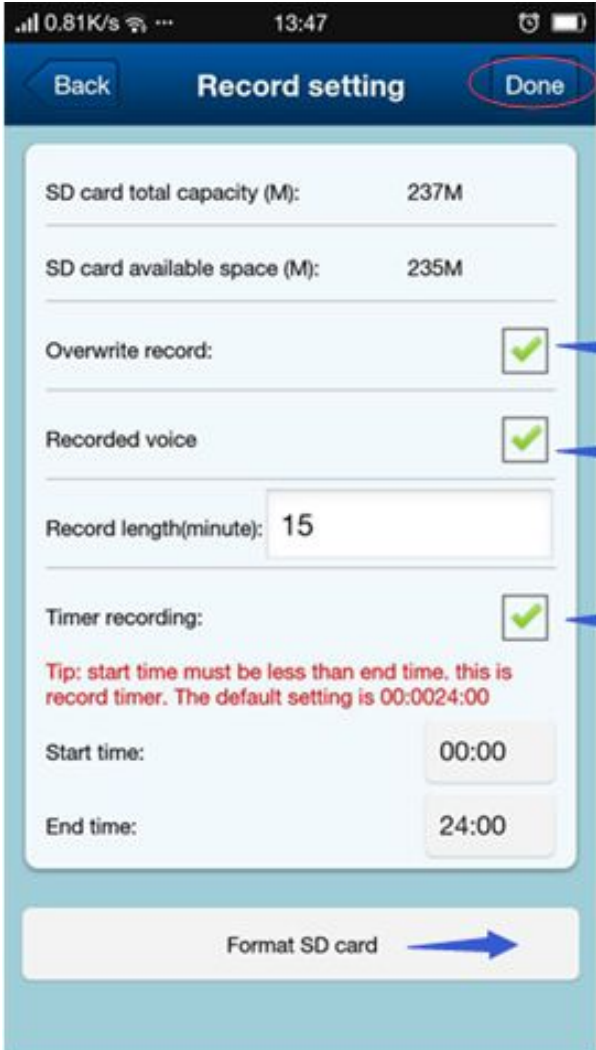

The screenshot shows the 'Record setting' screen of an application. At the top, there is a blue header with 'Back' on the left and 'Done' on the right. Below the header, the screen displays several settings:


- SD card total capacity (M): 237M
- SD card available space (M): 235M
- Overwrite record:
- Recorded voice:
- Record length(minute): 15
- Timer recording:
- Tip: start time must be less than end time. this is record timer. The default setting is 00:0024:00
- Start time: 00:00
- End time: 24:00

At the bottom of the screen, there is a button labeled 'Format SD card'.

Annotations with blue arrows point to various elements:

- A blue arrow points to the 'Done' button in the top right corner, with the text: "Do not forget click \"Done\" to save and enable all settings in the end."
- A blue arrow points to the 'Overwrite record' checkbox, with the text: "Enable: Camera will overwrite record when camera's capacity is full."
- A blue arrow points to the 'Recorded voice' checkbox, with the text: "Enable: Recorded videos will comes with voice."
- A blue arrow points to the 'Timer recording' checkbox, with the text: "Enable: you can set \"Start time\" to \"End time\" for timer recording, Camera will start recording automatically during this period."
- A blue arrow points to the 'Format SD card' button, with the text: "It's better to format the SD Card before record. Once done ,all dates on the sd card will be cleaned up."

8.7 Time Setting



The screenshot shows the 'Time' settings screen with the following elements and annotations:

- Device time:** Thur, 20 Nov 2014 15:16:02 UTC. An arrow points to this field with the annotation: "Display the recent time of the camera".
- Timezone:** (GMT +08:00)Beijing. An arrow points to the dropdown arrow on the right with the annotation: "Select the TimeZone".
- Use NTP provided values:** A checkbox that is checked with a green checkmark. An arrow points to this checkbox with the annotation: "NTP Time values setting, camera will get the time value from the server once settings done."
- NTP server:** time.windows.com. An arrow points to the dropdown arrow on the right of this field.
- Use the phone time calibrate device's clock:** A button at the bottom of the settings section. An arrow points to this button with the annotation: "Sync the camera's time to the phone".

